
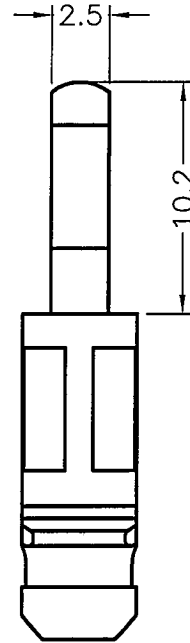


成型尺寸	公差
5mm以下	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm以上	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

HOLE IN P.C.B $\phi 4$
CHASSIS THICKNESS 1.2~1.7

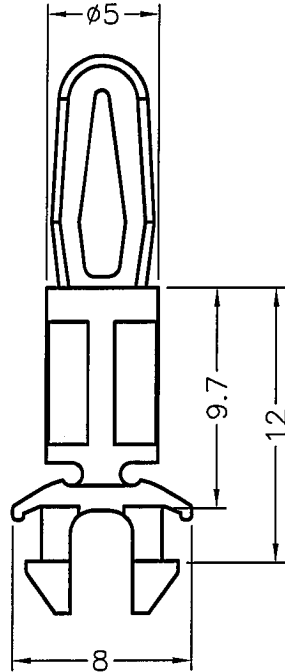

HOLE IN P.C.B $\phi 5.4$
CHASSIS THICKNESS 2.2

QMFZ2 Component - Plastics Friday, October 24, 2003 E44716
 RHODIA ENGINEERING PLASTICS
 QUARTIER BELLE-ETOILE AVE RAMBOZ BOITE POSTALE 64 69192 ST FONS CEDEX FRANCE
 Material Designation: B 50H1(r1)
 Product Description: Polyamide 66/6 (PA66/6), designated "Technyl" furnished as pellets.




Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.38	V-0	4	0	120	-	-	-	-
	0.75	V-0	4	0	120	90	95	-	-
BK	1	V-0, 5VB	4	0	120	90	95	-	-
	1.5	V-0	4	0	120	90	95	-	-
	3	V-0	3	0	120	90	95	-	-

CTI: 0 HVTR: 0 D495: 6 IEC Ball Pressure (C): -
 Dielectric Strength (kV/mm): - Volume Resistivity (10¹⁰ohm-cm): - Dimensional Stability(%): -
 ISO Tensile Strength (MPa): - ISO Flexural Strength (MPa): - ISO Heat Deflection (C): -
 ISO Tensile Impact (kJ/m²): - ISO Izod Impact (kJ/m²): - ISO Charpy Impact (kJ/m²): -
 (r1) Virgin and regrind up to 50% by weight incl. have the same basic material characteristics, except for the 5VB rating.

Report Date: 10/21/1993

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

 <p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 東莞康揚塑膠五金電子廠 DONG GUAN KANG YANG PLASTIC HARDWARE COMPANY 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p>	TITLE PC板間隔柱		產品規格圖面	
	MATERIAL NYLON 66 UL94V-0		DATE 2008.06.02	
	FINISH		DRAWN leeya	
	COLOR BLACK		CHECK 	
PART NUMBER UCBSL-10VB	DRAWING NUMBER UCBSL-HV0		APPROVED 	
SIZE A4	SCALE 3:1	UNIT mm	REV A	TOLERANCE SEE ABOVE