


SCW Self-closing braided wrap offers innovative solutions for the protection of breakout areas and provides easy removal when an inspection or maintenance of cables is necessary. The special open structure allows to be installed after other components, for example copper terminals and connectors.

**Drawing**

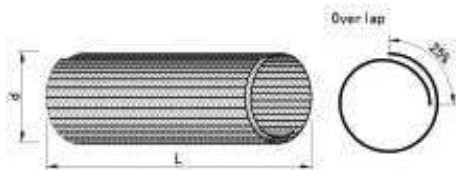

It is ideal application in wire harness, automatic equipments, railways, general manufacturing industry where wires and tubes need a tough and durable protection.

**Application**



Technical data	
Material	Polyester
Operating range	-50°C- +150°C
Melt point	240±10°C
Flammability	UL94-V2
Standard color	Black
Certificate	RoHS, Halogen Free
Cutting tool	Hot knife Scissors

Datasheet				
Part No.	I.D. (d)	Overlap (%)	Max. bundle dia.	Packing (m)
KSCW-006	6	25%	7	100
KSCW-009	9		10	100
KSCW-013	13		14	50
KSCW-016	16		17	25
KSCW-019	19		20	25
KSCW-025	25		26	25
KSCW-032	32		33	25
KSCW-038	38		40	25
KSCW-050	50		52	25

Unit: mm

Notes:

1. The part No. will be followed by BK, GR and so on to indicate the color of wrap.
2. Special packing, sizes and colors can be supplied upon request.
3. All numerical data are average or typical values, not including customized sizes.