





| DIM. | TOL |
|----------|------|
| 5mm DOWN | ±0.2 |
| 5~20mm | ±0.3 |
| 20~40mm | ±0.4 |
| 40~60mm | ±0.5 |
| 60~100mm | ±0.8 |
| 100mm UP | ±1.0 |

| REVISIONS | | | |
|-----------|-------------|------|----|
| REV | DESCRIPTION | DATE | BY |
| | | | |
| | | | |

FOR IN P.C.B $\phi 3.0$
P.C.B THICKNESS 1.2~1.7

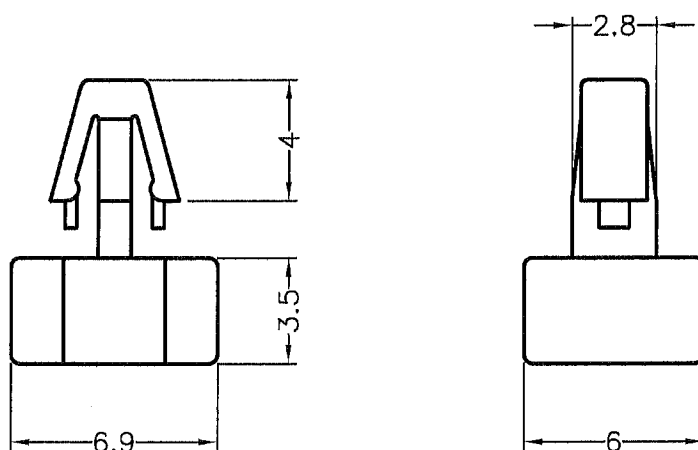

NOTE: All measurement does not include gate which raises under 0.3mm.

| | | | | | | | |
|---|----------|----------------|----------|-----------|------------------|---|---|
|  <p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. ISO 9001 ISO 14001 QC 080000 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p> | | | | TITLE | SPACER SUPPORT | SPEC. DWG. | |
| | | | | MATERIAL | NYLON 66 UL94V-2 | DATE | 2002.09.05 |
| | | | | HARDNESS | | DRAWN | S.J.C. |
| PART NUMBER | DCB-3.5D | DRAWING NUMBER | DCB-3.5D | COLOR | NATURAL | CHECK |  |
| SIZE | A4 | SCALE | 4:1 | UNIT | mm | REV | A |
| UNLESS OTHERWISE SPECIFIED TOLERANCE | | | | SEE ABOVE | APPROVED |  | |