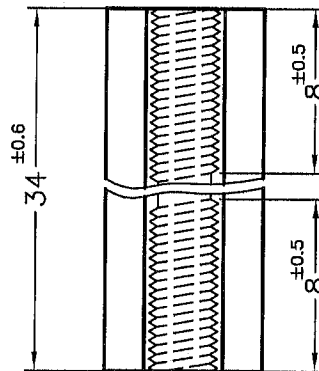
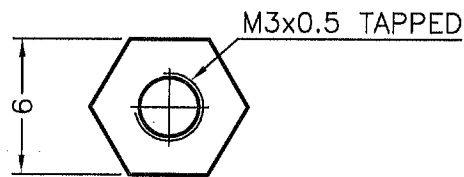




DTM.	TOL.
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY



NOTE: Inner thread was done by 2nd process taping.
 Some slight nylon burrs remained inslide the thread hole is a normal phenomenon.

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. ISO 9001 ISO 14001 QC 080000 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.	TITLE THREADED SPACER		SPEC. DWG.	
	MATERIAL NYLON 66 UL94V-2		DATE 2006.10.27	
	FINISH		DRAWN KEVIN	
	COLOR NATURAL		CHECK 	
PART NUMBER HP-34	DRAWING NUMBER HP-34		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	
SIZE A4	SCALE NONE	UNIT mm	REV A	APPROVED 