
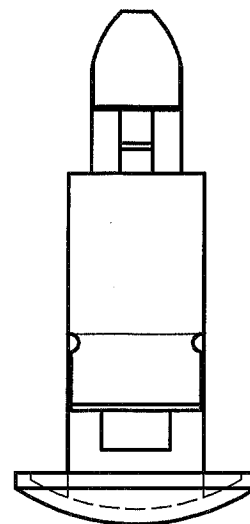


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

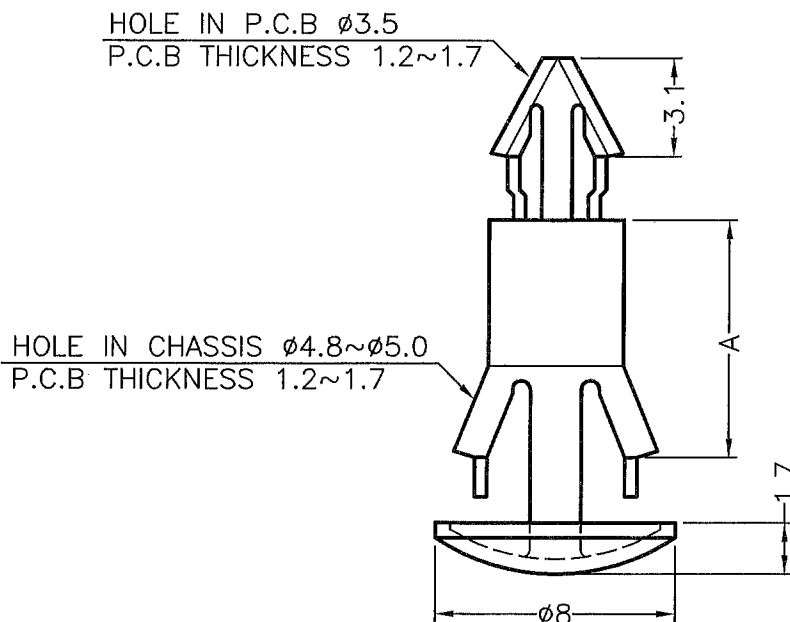

PART NO.	COLOR
RCT-8	NATURAL
RCT-8(B)	BLACK

NOTE: All measurement does not include gate which raises under 1.2mm.

Component - Plastic

E41938

E I DUPONT DE NEMOURS & CO INC

ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 80713, WILMINGTON DE 19880

101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)

Polyamide 66 (PA66), "Zytel", furnished as pellets

Color	Min Thk (mm)	Flame Class	HVI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	9.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): 13

High-Voltage Arc Tracking Rate (HATR): 0

Dimensional Stability (%): -

Inclined Plane Tracking (IPT): -

Volume Resistivity (10¹² ohm-cm): 14

High Volt, Low Current Arc Tests (D489): 6

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 745C.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" for Zytel or "RHN" for Rynite or "DEL" for Delrin or "CRA" for Crastin or "RVP" for Rynite or "ETPV" for ETPV grades.

rd - Virgin and regrid up to 50% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.71mm. For thickness 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTIs for all properties and Regrid exceeding 20% is limited to V-2 Flameability for V1, RD, EIC.

ANSI/UL 64 small-scale test data does not pertain to bulky materials, moldings and related contents. ANSI/UL 64 small-scale test data is intended solely for determining the feasibility of plastic materials used in the components and parts of test-protest devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1999-07-29
Last Revised: 2010-07-27

© 2011 Underwriters Laboratories Inc.



 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE SPACER SUPPORT		SPEC. DWG	
				MATERIAL NYLON 66 UL94V-2		DATE 2003.04.07	
				FINISH		DRAWN S.J.C.	
				COLOR SEE ABOVE		CHECK 	
				UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	
PART NUMBER SEE ABOVE		DRAWING NUMBER RCT-8					
SIZE A4	SCALE NONE	UNIT mm	REV B				