



DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

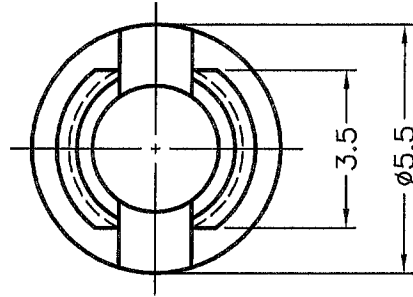

HOLE IN P.C.B: $\phi 4.0$
P.C.B THICKNESS: 1.6

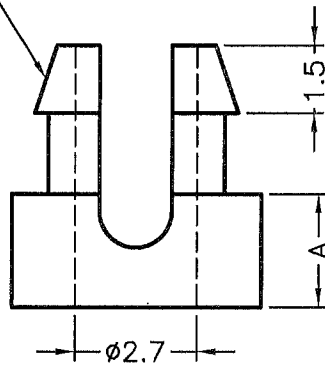

FOR M2.6 SCREW

PART NO.	A
SS2-2.5S	2.5
SS2-3S	3.0
SS2-4S	4.0
SS2-5S	5.0
SS2-6S	6.0

Component - Plastics

E41936

E I DUPONT DE NEMOURS & CO INC
ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 60743, WILMINGTON DE 19890
101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)
Polyamide 66 (PA66), "Zytel", furnished as pellets

Color	Min Thk (mm)	Flame Class	HVI	HA1	RTI Elec	RTI Imp	RTI Str.
ALL	0.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): D

Dielectric Strength (kV/mm): 13

High-Voltage Arc Tracking Rate (MATR): D

Dimensional Stability (%): -

Inclined Plane Tracking (IPT): -

Volume Resistivity (10^8 ohm-cm): 14

High Volt. Low Current Arc Resis (D495): 6

(F1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" for Zytel or "MIN" for Minlon or "DEL" for Delrin or "GRA" for Crastin or "RYN" for Rynite or "ETPV" for ETPV grades.

r9 - Virgin and regrind up to 60% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.7mm. For thicknesses 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTI for all properties and Regrid exceeding 25% is limited to V-2 Flammability for WT, RD, BK.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product circuits and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1999-07-20

Last Revised: 2010-07-27

© 2011 Underwriters Laboratories Inc.



NOTE: NYLON 66 UL94V-2 or EQUIVALENT

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.	TITLE		SPEC. DWG	
	MATERIAL		DATE	
	FINISH		DRAWN	
	COLOR		CHECK	
PART NUMBER	DRAWING NUMBER	UNLESS OTHERWISE SPECIFIED TOLERANCE		APPROVED
SEE ABOVE	SS2-HS	SEE ABOVE		Kang
SIZE	SCALE	UNIT	REV	
A4	NONE	mm	A	