


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY




HOLE IN P.C.B: $\phi 5.9\text{mm}$
P.C.B THICKNESS: 1.6mm

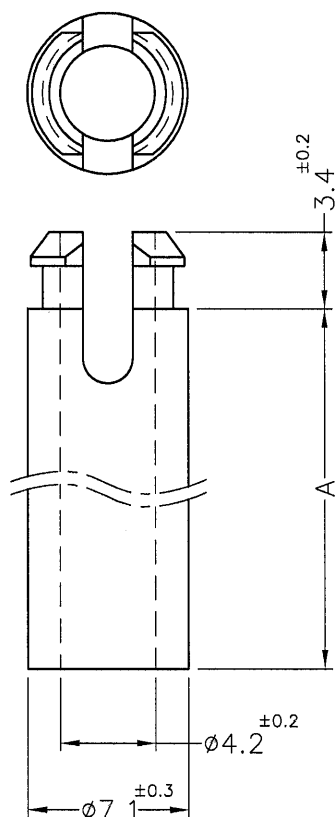

PART NO.	A
SS4-6	6.4
SS4-8	7.9
SS4-9	9.5
SS4-11	11.1
SS4-12S	12.0
SS4-12	12.7
SS4-16	15.9
SS4-17	17.0
SS4-19	19.1
SS4-22	22.2
SS4-25	25.4
SS4-30	30.0

FOR #8(M4) or #6(M3.5) SCREW

NOTE:MADE OF EQUIVALENT MATERIAL.
均可使用同等材質。

 <p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p>				TITLE	SPACER SUPPORT	SPEC. DWG.	
				MATERIAL	NYLON 66 UL94V-2	DATE	1988.10.13
				FINISH		DRAWN	S.J.C.
				COLOR	NATURAL	CHECK	
PART NUMBER	SEE ABOVE	DRAWING NUMBER	SS4-	UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE	APPROVED	
SIZE	A4	SCALE	NONE	UNIT	mm	REV	D