
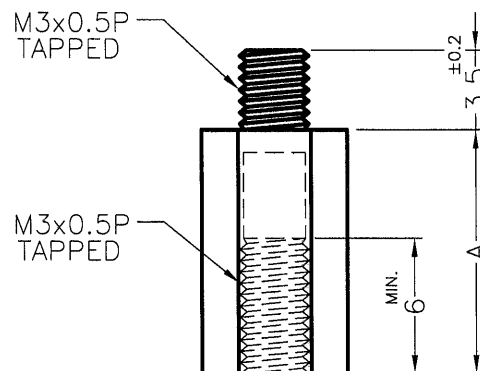


DIM	TOL
5mmDOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mmUP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY



PART NO.	A
TP-10.8	10.8
TP-11.2	11.2

NOTE:1. INNER THREAD WAS DONE BY 2ND PROCESS TAPING.
 SOME SLIGHT NYLON BURRS REMAINED INSIDE THE THREAD HOLE IS A NORMAL PHENOMENON.
 此為二次攻牙, 且因為尼龍材質緣故, 所以穴孔有些許尼龍屑, 屬正常現象.
 2. MADE OF EQUIVALENT MATERIAL.
 均可使用同等材質.

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE THREADED SPACER		SPEC. DWG.	
				MATERIAL NYLON 66 UL94V-2		DATE 2005.03.02	
				FINISH		DRAWN James	
				COLOR NATURAL		CHECK 	
PART NUMBER SEE ABOVE		DRAWING NUMBER TP-HH		UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED Kang	
SIZE A4	SCALE 3:1	UNIT mm	REV A				