



DIM.	TOL.
L ≤ 5	±0.2
5 < L ≤ 20	±0.3
20 < L ≤ 40	±0.4
40 < L ≤ 60	±0.5
60 < L ≤ 100	±0.8
ABOVE 100	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY



6-32UNC
TAPPED

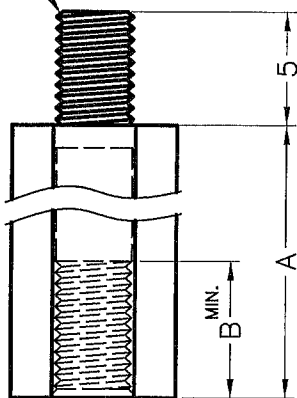

PART NO.	A	B
TP632-5S	5.0	3.0
TP632-5.5S	5.5	3.5
TP632-6S	6.0	4.0
TP632-6.3S	6.3	4.0
TP632-8S	8.0	6.0
TP632-9S	9.0	6.0
TP632-10S	10.0	6.0
TP632-11S	11.0	6.0
TP632-12S	12.0	6.0
TP632-12.7S	12.7	6.0
TP632-15.9S	15.9	6.0
TP632-19.1S	19.1	6.0
TP632-25.4S	25.4	6.0
TP632-31.8S	31.8	6.0

Component - Plastic

E41938

E I DUPONT DE NEMOURS & CO INC
ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 80713, WILMINGTON DE 19880
101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)
Polyamide 66 (PA66), "Zytel", furnished as pellets.

Color	Min Thk (mm)	Flame Class	HWI	HAI	Elac	RTI itrip	RTI Str.
ALL	0.71	V-2	4	0	130	75	86
	1.5	V-2	3	0	130	75	86
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): 13

High-Voltage Arc Tracking Rate (NTR): 0

Dimensional Stability (%): -

Inched Plane Tracking (IPT): -

Volume Resistance (10⁴ ohm-cm): 14

High-Volt. Low Current Arc Resis (D465): 6

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and immersion in accordance with UL 746C.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers, (2) Material designations may be prefixed by "ZYT" for Zytel or "MIN" for Minlon or "DEL" for Delrin or "GRA" for Crastin or "RYN" for Rynite or "ETPV" for ETPV grades.

r9 - Virgin and regrind up to 50% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.7mm. For thicknesses 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTI for all properties and Regrid exceeding 25% is limited to V-2 Flammability for WT, RD, BK.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1998-07-29

Last Revised: 2010-07-27

© 2011 Underwriters Laboratories Inc.



NOTE: NYLON 66 UL94V-2 or EQUIVALENT

K
ISO 9001
ISO 14001
QC 080000

康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN) CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

TITLE		SPEC. DWG.	
THREADED SPACER		DATE	
MATERIAL		2007.03.19	
NYLON 66 UL94V-2		DRAWN	
FINISH		JOHNNY	
COLOR		CHECK	
NATURAL			
UNLESS OTHERWISE SPECIFIED TOLERANCE		APPROVED	
SEE ABOVE			
PART NUMBER	DRAWING NUMBER	COLOR	CHECK
SEE ABOVE	TP632-HS	NATURAL	
SIZE	SCALE	UNIT	REV
A4	NONE	mm	B