


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY




HOLE IN P.C.B: $\phi 4.0\text{mm}$
THICKNESS: 1.2~2.0mm

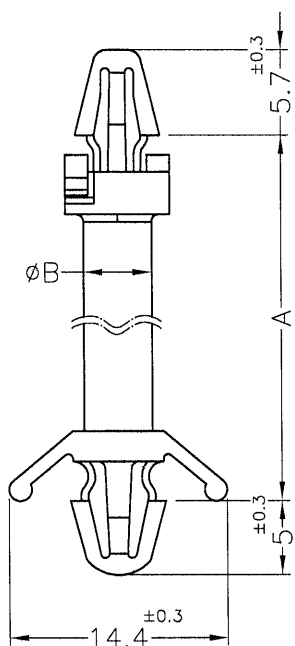

PART NO.	A	ϕB
VCBS-9	9.8	
VCBS-11	11.4	4.0
VCBS-14	14.4	4.0
VCBS-16	16.6	4.0
VCBS-17	17.7	4.0
VCBS-20	20.9	4.0
VCBS-24	24.1	4.5
VCBS-27	27.2	4.5
VCBS-30	30.4	4.5
VCBS-33	33.6	4.5
VCBS-39	39.9	4.5

HOLE IN P.C.B: $\phi 4.8\text{mm}$
THICKNESS: 0.8~2.0mm

- NOTE: 1. MADE OF EQUIVALENT MATERIAL.
均可使用同等材質。
2. SHRINKING IS NORMAL STATUS.
內縮為正常現象。

 <p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p>		TITLE	SPACER SUPPORT	SPEC. DWG.
		MATERIAL	NYLON 66 UL94V-2	DATE
PART NUMBER		FINISH	DRAWN	SAI
SEE ABOVE		COLOR	CHECK	
DRAWING NUMBER		UNLESS OTHERWISE SPECIFIED TOLERANCE	APPROVED	
SIZE	SCALE	SEE ABOVE		
A4	2:1			
DRAWING NUMBER				
VCBS-H				
UNIT	REV			
mm	B			