
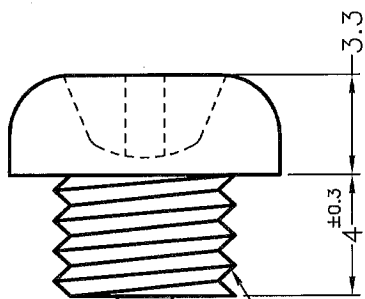


成型尺寸	公差
L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY

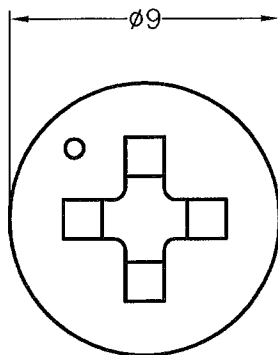

入料點 M6X1
註: 高度不含入料點

QMfZ2 Component - Plastics Tuesday, June 08, 2004 E50075
TEIJIN CHEMICALS LTD
HIBIYA DAIBIRU BLDG 2-2 UCHISAIWAI-CHO 1-CHOME CHIYODA-KU TOKYO 100-0011 JAPAN
Material Designation: L-1225(#)(f2)

Product Description: Polycarbonate (PC), designated "Panlite" furnished as pellets, powder.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.4	V-2	4	3	80	80	80	-	-
	0.75	V-2	3	1	80	80	80	-	-
	1.5	V-2	3	1	125	115	125	-	-
	1.9	HB	3	1	125	115	125	-	-
	3	HB	2	1	125	115	125	-	-
	6	HB	1	1	125	115	125	-	-

Dielectric Strength (kV/mm): 30

ISO Tensile Strength (kN/Pat): -

ISO Tensile Impact (kJ/m²): -

(#)

(f2)

Volume Resistivity (10¹⁰ohm-cm): 16

ISO Flexural Strength (MPa): -

ISO Izod Impact (kJ/m²): -

Material designation may be suffixed with any one or two letters.

Subjected to one or more of the following tests: Ultraviolet Light, Water Exposure or Immersion in accordance with UL 746C, where the acceptability for outdoor use is to be determined by UL Inc.

IEC Ball Pressure (Cr): -

Dimensional Stability(%): 0

ISO Heat Deflection (°C): -

ISO Charpy Impact (kJ/m²): -

Report Date: 2/10/1989

Underwriters Laboratories Inc®

<p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p>		TITLE	塑膠螺絲	產品規格圖面			
		MATERIAL	PC UL94V-2	DATE	2013.05.07		
		FINISH		DRAWN	T.C		
		COLOR	NATURAL	CHECK	宋洋 王日賜		
PART NUMBER	M6-4PC	DRAWING NUMBER	M6-HPC	UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE	APPROVED	Kang
SIZE	A4	SCALE	4:1	UNIT	mm	REV	A