

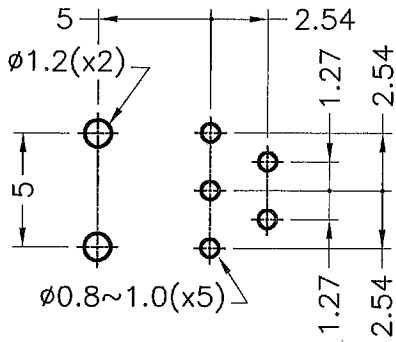
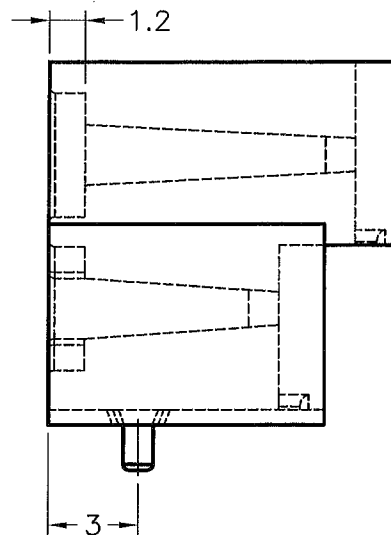


DIM.	TOL
L ≤ 10	±0.2
10 < L ≤ 30	±0.3
30 < L ≤ 50	±0.5
50 < L ≤ 100	±0.7
100 < L ≤ 250	±1.2
ABOVE 250	±1.5

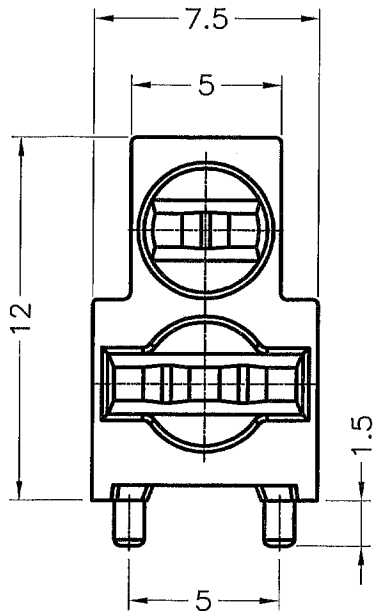

RECOMMEND MOUNTING HOLE
RECOMMEND THICKNESS: 1.6mm

REVISIONS			
REV	DESCRIPTION	DATE	BY

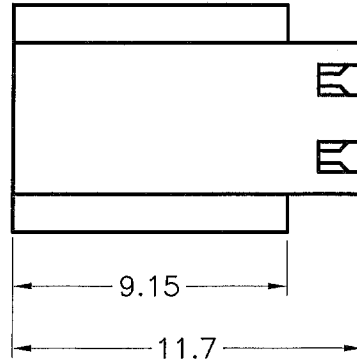

QMFZ2 Component - Plastics
RHODIA ENGINEERING PLASTICS
QUARTIER BELLE-ETOILE AVE RAMBOZ BOITE POSTALE 64 69192 ST FONS CEDEX FRANCE
Material Designation: B 50H1(r1)

Friday, October 24, 2003

E44716

Product Description: Polyamide 66/6 (PA66/6), designated "Technyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IBC GWIT	IBC GWFI
ALL	0.38	V-0	4	0	120	-	-	-	-
	0.75	V-0	4	0	120	90	95	-	-
BK	1	V-0, 5VB	4	0	120	90	95	-	-
	1.5	V-0	4	0	120	90	95	-	-
	3	V-0	3	0	120	90	95	-	-

CTI: 0

HVTR: 0

D495: 6

IBC Ball Pressure (Ck -

Dielectric Strength (kV/mm) -

Volume Resistivity (10¹⁰ohm-cm) -

Dimensional Stability(%) -

ISO Tensile Strength (MPa) -

ISO Flexural Strength (MPa) -

ISO Heat Deflection (Ck) -

ISO Tensile Impact (kJ/m²) -

ISO Izod Impact (kJ/m²) -

ISO Charpy Impact (kJ/m²) -

(r1) Virgin and regrind up to 50% by weight incl. have the same basic material characteristics, except for the 5VB rating.

Report Date: 10/21/1993

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN) CO., LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

TITLE 90° LED SPACER SUPPORT	SPEC. DWG.
MATERIAL NYLON 66 UL94V-0	DATE 2013.05.31
FINISH	DRAWN K.W
COLOR BLACK	CHECK
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED Kang

PART NUMBER LEK-345V0(B)	DRAWING NUMBER LEK-345
SIZE A4	SCALE 4:1
UNIT mm	REV A